



10104
Bitzer 4DC 7.2Y

Version 5.3.2


28-1-2013 / All data subject to change.

Compressor Selection: Semi-hermetic Reciprocating Compressors

Input Values

Compressor model	4DC-7.2Y
Refrigerant	R404A
Reference temperature	Dew point temp.
Evaporating SST	-5°C
Condensing SDT	40°C
Liquid subcooling(in Cond.)	5K
Suct. gas superheat	10K
Operating mode	Auto
Power supply	400V-3-50Hz
Useful superheat	100%
Capacity Control	100%

Application Limits (R404A/R507A)

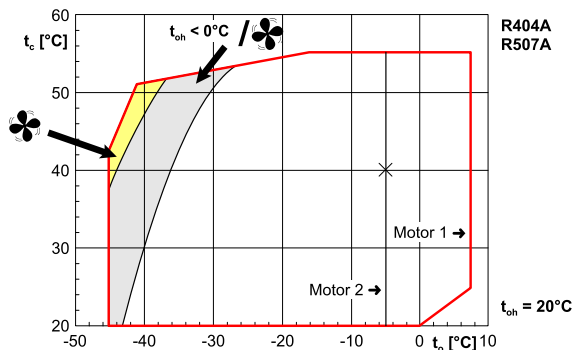

Output

Compressor model	4DC-7.2Y-40S
Cooling capacity	17.73 kW
Cooling capacity *	17.48 kW
Evaporator capacity	17.73 kW
Power input	6.26 kW
Current (400V)	12.03 A
Voltage range	380-420V
Condenser capacity	24.0 kW
COP/EER	2.83
COP/EER *	2.79
Mass flow	527 kg/h
Operating mode	Standard
Discharge gas temp. w/o cooling	67.0 °C



*Compressor-Performance data certified by ASERCOM (see T.Data/ Notes)

*According to EN12900 (20°C suction gas temp., 0K liquid subcooling)